

Provect-OX2™ – *In Situ* Chemical Oxidation + Enhanced Bioremediation for Contaminant Mass Destruction

Former Gasoline Station – Point Pleasant Beach, New Jersey
Constituents of Interest – BTEX, Trimethylbenzenes, and TICs


Project Summary

A former gas station located in Point Pleasant Beach, New Jersey was impacted with petroleum hydrocarbons due to leaks from underground storage tanks. The primary contaminants of interest (COIs) at the site were benzene, toluene, ethylbenzene, xylene (BTEX), trimethylbenzenes, and tentatively identified compounds (TICs). The area of concern (AOC) was approx. 2,600 sq ft with a target vertical interval from 7 to 11 feet below ground surface (ft bgs). The geology at the site is primarily a fine to medium grained sand with groundwater being encountered from 7 to 9 ft bgs. Provect-OX2™ was applied *in situ* to address the residual sorbed and dissolved phase petroleum hydrocarbon contaminant mass. Three primary monitoring wells were impacted within this AOC, including MW-1R, MW-5, and MW-9.

Remediation Plan

The remedial scope of work was developed by MidAtlantic Engineering Partners, LLC. and Provectus Environmental Products, Inc. (Provectus), which included the application of 7,550 lbs of Provect-OX2™ to the targeted AOC (**Figure 1**). Provect-OX2™ is a dual-functioning reagent blend that combines *in situ* chemical oxidation (ISCO) plus enhanced bioremediation (US Patent 9,126,245; patents pending). Provect-OX2™ rapidly oxidizes the organic contaminants present in soil and groundwater and provides long-term, sustained secondary bioremediation to manage residuals and prevent contaminant rebound. This is accomplished by using ferric iron (Fe III) as a safe and effective means of activating sodium and potassium persulfates, which quickly yields sulfate radicals ($\text{SO}_4^{\cdot-}$) for chemical oxidation treatment. A pH buffer is also preblended with the Provect-OX2™ to offset any post-injection acidic pH conditions that are normally observed with traditional persulfate applications. The technology enhances subsequent utilization of sulfate and iron as terminal electron acceptors for facultative redox reactions to support secondary biodegradation of any residual contaminant mass.

Figure 1: Site Map

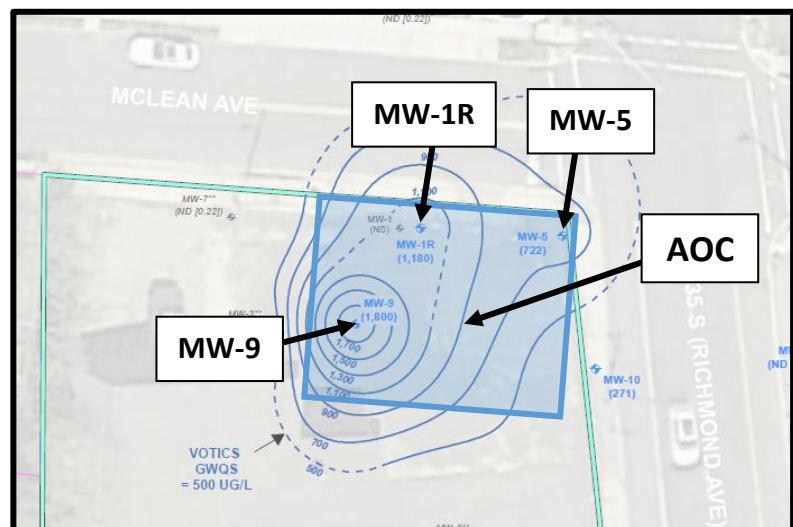

The initial implementation plan included slurry injection of Provect-OX2™ at 12 temporary direct push points spaced on 15 ft. centers. Due to elevated injection pressures and heaving sands, a revised implementation plan was developed in the field after the first injection point was completed. The revised plan included the emplacement of Provect-OX2™ into augured boreholes. To ensure a sufficient radius of influence was achieved, a total of 13 boreholes were added to the remediation plan, yielding a total of 25 application locations in a grid-like pattern. The Provect-OX2™ application was implemented between July 22nd and July 27th, 2020. **Figure 2** depicts the treatment AOC.

Figure 2: Area of Concern



Treatment Program Results

Post-application analytical data for the three target monitoring wells are presented below in **Table 1**, **Table 2**, and **Table 3**. MW-1R and MW-9 show the greatest contaminant reductions, with nearly all individual constituents being reduced by more than 95% and all COIs below New Jersey Groundwater Quality Standards (NJ GWQS). Additionally, the geochemistry data for the three target wells exhibit elevated ORPs 12 months after the Provect-OX2™ application including >+100 mV at MW-1R and MW-9. The included pH buffer component of the product offset production of sulfuric acid that is created due to persulfate activation (e.g., common persulfate applications exhibit pH <4). Field data for the monitoring wells are presented below in **Table 4**, **Table 5**, and **Table 6**. Changes in these field parameters are positive indicators of a successful field application and sufficient Provect-OX2™ distribution within the targeted area.

Table 1. VOC Data for MW-1R

MW-1R							
Sample Date	02/18	02/2020 (Baseline)	10/20	01/21	04/21	07/21	Reductions
Benzene (1 µg/L)	8	ND	ND	ND	ND	ND	100%
Toluene (600 µg/L)	ND	60	17.1	10.1	ND	ND	100%
Ethylbenzene (700 µg/L)	386	780	374	328	170	6.1	99.2%
Total Xylenes (1,000 µg/L)	1,529	3,700	562	1,051	520	5.7	99.8%
1,2,4-TMB (100 µg/L)	720	1,100	ND	525	140	4.5	99.6%
TICs (500 µg/L)	1,180	2,500	1,686	3,690	540	3.4	99.9%

ND: Non-Detect ; Shaded indicates compound detected above NJDEP GWQC (standards in parentheses).

Table 2. VOC Data for MW-5

MW-5							
Sample Date	02/18	02/2020 (Baseline)	10/20	01/21	04/21	07/21	Reductions
Benzene (1 µg/L)	ND	ND	ND	0.6	ND	ND	100%
Toluene (600 µg/L)	577	160	ND	511	440	210	-31.3%
Ethylbenzene (700 µg/L)	400	150	ND	454	400	210	-40.0%
Total Xylenes (1,000 µg/L)	1,521	660	ND	1,128	670	300	54.5%
1,2,4-TMB (100 µg/L)	300	330	ND	75.9	49.0	8.3	97.5%
TICs (500 µg/L)	722	640	ND	3,159	1,200	450	29.7%

ND: Non-Detect ; Shaded indicates compound detected above NJDEP GWQC (standards in parentheses).

Table 3. VOC Data for MW-9

MW-9							
SampleDate	02/18	02/2020 (Baseline)	10/20	01/21	04/21	07/21	Reductions
Benzene (1 µg/L)	ND	ND	ND	ND	ND	ND	-
Toluene (600 µg/L)	8.2	30	1.1	4.6	37	ND	100%
Ethylbenzene (700 µg/L)	123	660	26	243	190	27	95.9%
Total Xylenes (1,000 µg/L)	451	3,100	40	971	600	ND	100%
1,2,4-TMB (100 µg/L)	329	1,100	ND	479	180	ND	100%
TICs (500 µg/L)	1,800	2,200	317	2,825	750	460	79.1%

ND: Non-Detect ; Shaded indicates compound detected above NJDEP GWQC (standards in parentheses).

Table 4. Field Data for MW-1R

MW-1R					
Sample Date	02/2020 (Baseline)	10/20	01/21	04/21	07/21
pH	6.4	5.1	5.5	5.6	6.3
ORP (mV)	-45	+19	+5	+88	+118

Table 5. Field Data for MW-5

MW-5					
Sample Date	02/2020 (Baseline)	10/20	01/21	04/21	07/21
pH	6.3	5.4	5.1	5.9	5.91
ORP (mV)	-25	+84	+308	+210	+157

Table 6. Field Data for MW-9

MW-9					
Sample Date	02/2020 (Baseline)	10/20	01/21	04/21	07/21
pH	6.3	5.4	5.1	5.9	5.9
ORP (mV)	-3	+90	+143	+79	+61

The targeted contaminants have reached the NJ GWQS within 1 year after the Provect-OX2™ application. We anticipate reductions will continue as the geochemistry remains ideal with ORPs still increasing due to continued potassium persulfate release. Furthermore, the secondary iron and sulfate enhanced bioremediation processes will remain active in the subsurface for several years after the ISCO reactions are complete.

Please contact our office at (815) 650-2230 or via email at info@provectusenv.com for additional information regarding this project or our technologies.